


## SINGLE-HEAD Bander BD

### Technical data

Technical data for “Single-Head bander BD”

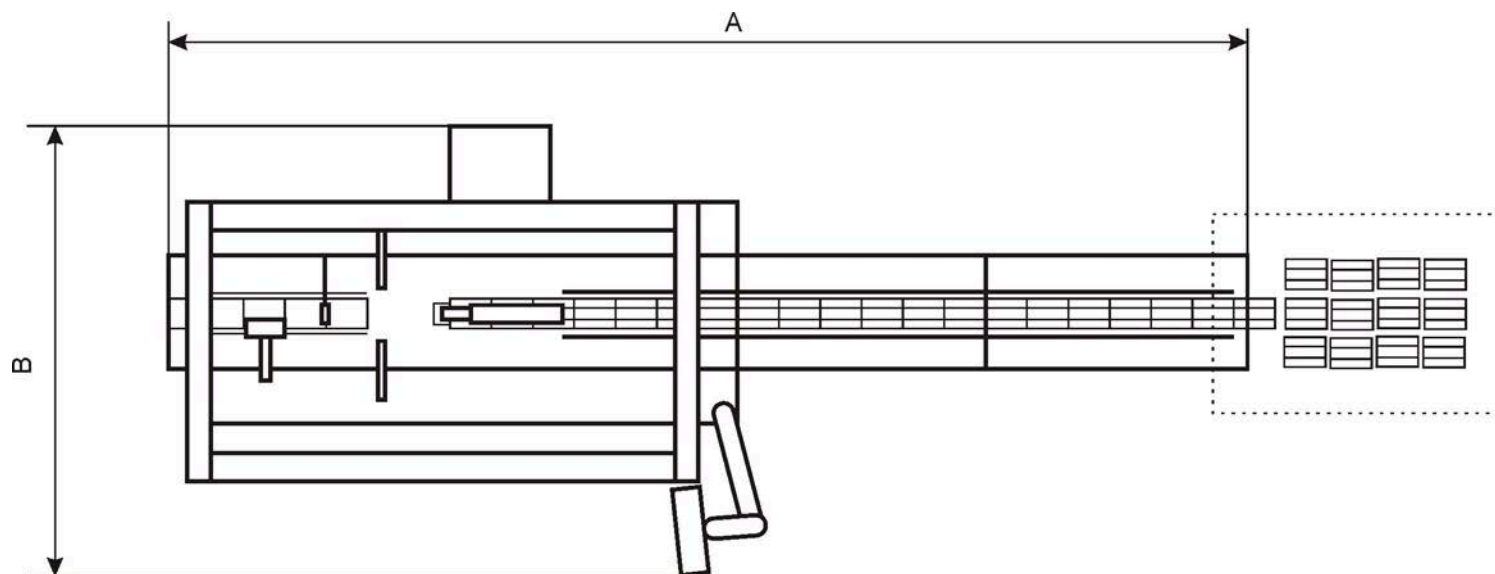


*Floor plan for Single-Head Bander BD*

A length [mm]	2821
B width [mm]	1558
Height [mm]	2430
Weight, net [kg]	1500
Label size, min. (Y) [mm]	16
Label size, min. (X) [mm]	36
Label size, max. (Y) [mm]	170
Label size, max. (X) [mm]	210
Operation altitude, min. [mm]	30
Operation altitude, max. [mm]	125
Stack bundling up to max [mm]	500
Banding stations max. [mm]	1
Compressed-air requirements [l/min.]	170
Performance max., (dependent on material / label size) [cycles/min]	16
Electric power input (apparent power) [kVA]	0.65
Supply voltage 360-420V, 50/60 Hz	0.65
Current consumption [A]	16
Fuse max. [A]	
Power output (heat output) [BTU/h]	2,218

**Attention!**

The wire cross section of the power supply to the machine must correspond to valid regulations in the country of use. The same applies to the plug connectors used.



*Format, north-south banded*

**Technical data of “banding material”**

	<b>Flat sheet film Biaxially elongated</b>	<b>Kraft paper, coated, machine-finished</b>	<b>Adhesive tape Tesa-Film 7133</b>
Roll width, standard [mm]	20	20	North-south:19 / East-west:15
Roll width, optional [mm]	40	40	-
Color	Transparent	Brown, white	Blue
Material	PETP / PE	Kraft paper / PE matt	PP self-adhesive
Band strength	60/19µm	70g/m <sup>2</sup> on PE 30 µm	80µm
Core diameter [mm]	76	76	76
Band length [m]	850	600	330
Roll diameter, max. [mm]	320	325	200
Suppliers	Salpack GmbH Schulweg 20 D-86505 Merching Tel. +49 (0) 8233/4790 Fax. +49 (0) 8233/30583 <a href="http://www.salpack.de">www.salpack.de</a> Bandpack GmbH Kobelstr. 60b D-86356 Neusäß Fax. +49 (0) 82/48687968 <a href="http://www.bandpack.de">www.bandpack.de</a>		Scharnau GmbH Oststr.3 D-16356 Werneuchen Tel. +49 (0) 33398/845-0 Fax. +49 (0) 33398/845-20 <a href="http://www.scharnau.de">www.scharnau.de</a>