


SINGLE-HEAD Bander BD


Technical data

Technical data for "Single-Head bander BD"

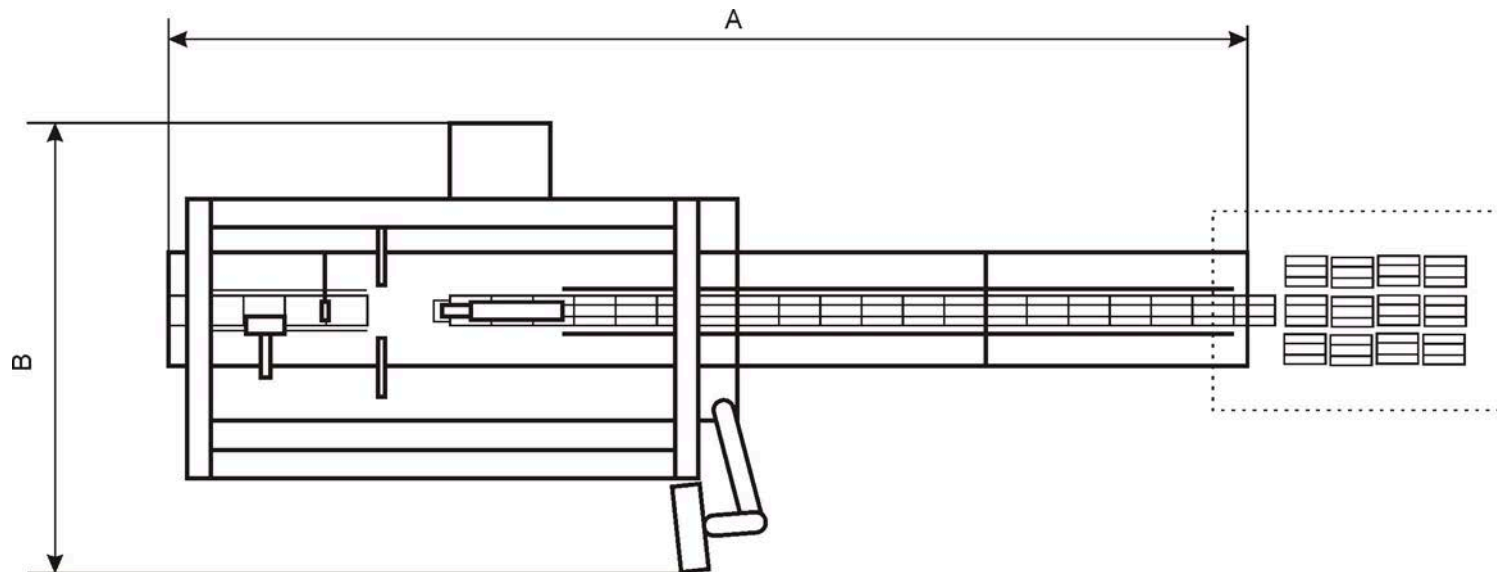

Floor plan for Single-Head Bander BD

A length [mm]	2821
B width [mm]	1558
Height [mm]	2430
Weight, net [kg]	1500
Label size, min. (Y) [mm]	16
Label size, min. (X) [mm]	36
Label size, max. (Y) [mm]	170
Label size, max. (X) [mm]	210
Operation altitude, min. [mm]	30
Operation altitude, max. [mm]	125
Stack bundling up to max [mm]	500
Banding stations max. [mm]	1
Compressed-air requirements [l/min.]	170
Performance max., (dependent on material / label size) [cycles/min]	16
Electric power input (apparent power) [kVA]	0.65
Supply voltage 360-420V, 50/60 Hz	0.65
Current consumption [A]	16
Fuse max. [A]	
Power output (heat output) [BTU/h]	2,218
Attention! The wire cross section of the power supply to the machine must correspond to valid regulations in the country of use. The same applies to the plug connectors used.	

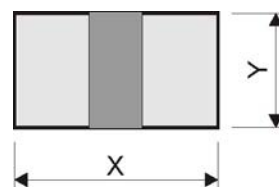

Format, north-south banded

Technical data of “banding material”

	Flat sheet film Biaxially elongated	Kraft paper, coated, machine-finished	Adhesive tape Tesa-Film 7133
Roll width, standard [mm]	20	20	North-south:19 / East-west:15
Roll width, optional [mm]	40	40	-
Color	Transparent	Brown, white	Blue
Material	PETP / PE	Kraft paper / PE matt	PP self-adhesive
Band strength	60/19µm	70g/m ² on PE 30 µm	80µm
Core diameter [mm]	76	76	76
Band length [m]	850	600	330
Roll diameter, max. [mm]	320	325	200
Suppliers	Salpack GmbH Schulweg 20 D-86505 Merching Tel. +49 (0) 8233/4790 Fax. +49 (0) 8233/30583 www.salpack.de Bandpack GmbH Kobelstr. 60b D-86356 Neusäß Fax. +49 (0) 82/48687968 www.bandpack.de		Scharnau GmbH Oststr.3 D-16356 Werneuchen Tel. +49 (0) 33398/845-0 Fax. +49 (0) 33398/845-20 www.scharnau.de