



Double-station bander BS-duo

Technical data for "double-station bander BS-duo"



DOUBLE-STATION BANDER BS-DUO

Technical data for "double-station bander BS-duo"

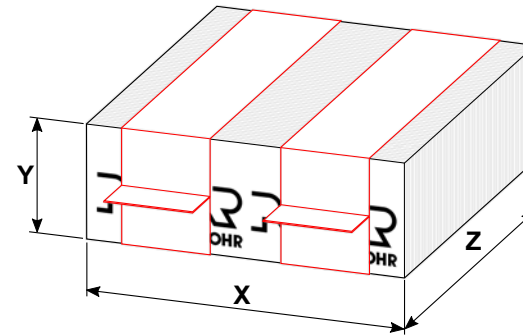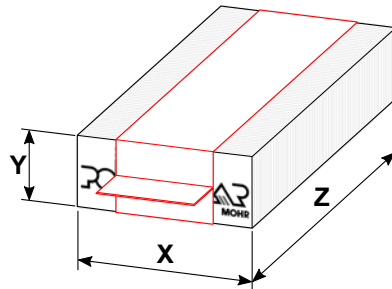

Technical data	Single bonding station	Double bonding station
Weight, net [kg]	850	920
Label width, min. (Y) [mm]	16	12
Label length, min. (X) [mm]	40	102
Label width, max. (Y) [mm]	50	12
Label length, max. (X) [mm]	120	120
Label height, min. (Z) [mm]	25	25
Label height, max. (Z) [mm]	90	90
Number of rolls of band material	4	8
Compressed-air requirement [l/min.]	170	170
Machine output, max. [packages/min.]	24 – 28*	24 – 28*
Compressed-air supply, 6 bar [l/min]	200	230
Electric power consumption (apparent power) [kVA]	1.2	1.2
Supply voltage [V, Hz]	400, 50	400, 50
Fuse max. [A]	16	16
Power output (heat output) [BTU/h]	2,218	2,218